

SAILOR® 6140 MINI-C MARITIME

COBHAM

New generation Inmarsat mini-C VMS & tracking solution

2014 Product Sheet

The most important thing we build is trust

The SAILOR 6140 mini-C Maritime is a sophisticated, dedicated Vessel Management System (VMS) and tracking terminal. It supersedes the well established SAILOR 3026M/S, which is used aboard thousands of professional fishing vessels worldwide, to meet mandatory requirements for the carriage of satellite tracking equipment.

Designed for extreme conditions

The system is a single, self-contained and sealed terminal, housing both antenna and transceiver. This design approach has proven to be rugged and reliable, especially for use aboard the harsh environment of a professional fishing vessel. With the terminal's 50 channel GPS module and omni-directional antenna, satellite fix and position are ensured even under the most adverse conditions.

Today, it is mandatory for fishing vessels in more than 40 countries around the world to carry satellite tracking equipment. Since the mid-90's Thrane & Thrane has delivered more than 25,000 Inmarsat-C and mini-C terminals for monitoring solutions all over the world and the next generation SAILOR 6140 mini-C Maritime is based on the unmatched experience Thrane & Thrane has in developing innovative satellite tracking systems.

Ensure you meet requirements

With the SAILOR 6140 mini-C Maritime you can be sure that you are meeting requirements through a wide range of functionality.

Data Reporting

A standard data report contains information about latitude, longitude, speed, course, time, date as well as the SAILOR

mini-C identity number. However, the data report package can be tailored to suit specific needs.

Vessel Monitoring System (VMS)

SAILOR 6140 mini-C Maritime provides a number of advanced tracking functions. With GeoFencing you can divide relevant sea areas into a range of geographical zones meaning you can define special areas of interest where specific reporting intervals come into effect and also be alerted when your vessel is out of its designated zone. With increased memory capacity the terminal is now able to hold a multitude of different zones and programs.

Two-Way Messaging

With the SAILOR 6140 mini-C Maritime it is easy to send various types of text messages. Simply connect a PC to the terminal and you are ready to receive Enhanced Group Calls or send catch reports at all times. You can also exchange e-mails, fax, SMS, and special messages to other Inmarsat-C users.


Event Reporting

With the optional TCU programming for advanced monitoring is available with up to 14 I/O pins or 7 output pins, depending on configuration. Power events, antenna blockage and other events can trigger event reports.



SAILOR® 6140 MINI-C MARITIME

New generation Inmarsat mini-C VMS & tracking solution

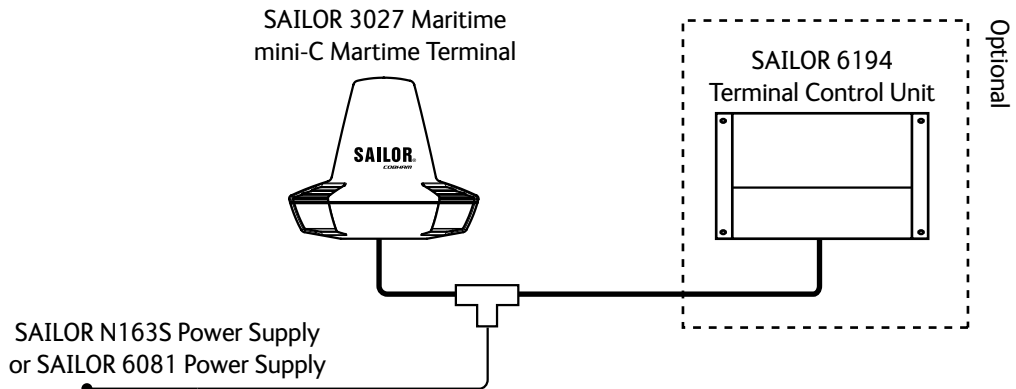

GENERAL

General specifications	Meets Inmarsat maritime specifications and IMO LRIT requirements
Inmarsat Type Approval	4TT097

TERMINAL UNIT SPECIFICATIONS

Operating frequencies	Rx Frequency Band: Rx: 1525 - 1545 MHz Tx Frequency Band: Tx: 1626.5 - 1646.5 MHz
GPS module	50 channel
Terminal interface	NMEA2K DeviceNet Mini-style, Male

ANTENNA UNIT SPECIFICATIONS

G/T	-23.7 dBk at 5° elevation
EIRP	Min. 7 dBW at 5° elevation
Antenna elevation	-15° to 90°

POWER SPECIFICATIONS

Absolute power supply range	10.5 - 32 VDC
Nominal power input	15 VDC
Power consumption (typical)	Rx: 1.85 W @ 15 VDC Tx: 22 W @ 15 VDC

TERMINAL CONTROL UNIT SPECIFICATIONS

Interface options	CAN interface NMEA2K mini RS-232 LAN interface RJ45
-------------------	---

DIMENSIONS AND WEIGHT

mini-C Terminal	Diameter: 170.5 mm Height: 145 mm (without pole mount) Weight: 1,1 Kg
Terminal Control Unit	239 mm x 172 mm x 54 mm Weight: 0,8 Kg

COMPARISON CHART

	SAILOR 6110 mini-C	SAILOR 6120 mini-C	SAILOR 6130 mini-C	SAILOR 6140 mini-C	SAILOR 6150 mini-C
GMDSS	X				
SSAS	X	X			
LRIT	X	X	X		
SafetyNET	X		X	X	X
Non-SOLAS Distress					X
Tracking	X	X	X	X	X

ThraneLINK

ThraneLINK is a sophisticated communication protocol that connects the SAILOR products in a network, offering important new opportunities to vessels. It provides facility for remote diagnostics and enables access to all the SAILOR products from a single point for service. This results in optimized maintenance and lower cost of ownership because less time is needed for troubleshooting and service. Installation is made easier as ThraneLINK automatically identifies new products in the system. The uniform protocol is an open standard which provides a future proof solution for all vessels.

71-133781-A03 08.14 MBU



AMI Connect Head Office:

107 Forsyth Street, O'Connor 6163, WA

T: (08) 9331 0070

E: sales@amiconnect.com.au

Support: support@amiconnect.com.au

Branches Australia Wide & International

Perth, Adelaide, Sydney, Brisbane, Darwin, Cairns, Melbourne, Singapore & Vietnam

Visit us online: www.amiconnect.com.au

A Member of the AMI Group | ABN: 88 569 498 390